

BDE-RFM207P USER GUIDE

Introduction

This user guide is for BDE-RFM207P, a Wireless Module based on TI CC2652P.

It is a quick start guide for how to connect the module with the evaluation board BDE-EVB07 or with the TI launchpad, and how to build the first application. It also shows a demo for how BDE-RFM207P receives a data packet that is sent from a mobile phone APP - nRF Connect.

Get Ready

The following tools are recommended to develop with BDE-RFM207P.

Hardware tools:

- BDE-RFM207P ([BDE-RFM207P-BDE Technology Inc. \(bdecomm.com\)](http://BDE-RFM207P-BDE Technology Inc. (bdecomm.com)))
- BDE-ADP208 V1.0 (adaptor board)
- PC or Laptop
- BDE-EVB07 ([BDE-EVB07-BDE Technology Inc. \(bdecomm.com\)](http://BDE-EVB07-BDE Technology Inc. (bdecomm.com)))
- or
- TI Launchpad (LAUNCHXL-CC26X2R1 Evaluation board | TI.com)
- USB cable for power supply and debugging

Software tools:

- Terminal software such as CCS, IAR.
- [CCS download](#)
- [Software Development Kit \(SDK\)](#)
- [nRF Connect](#)


Build Your First Application

Once have the Hardware and Software tools in place, please following the following steps:


A. Connect the Hardware

If chose EVB07:

Use USB cable to connect EVB07 and PC or laptop. Plug BDE-RFM207P with the adaptor board into the dev board and connect all the pins with Jumpers as the following picture shows.

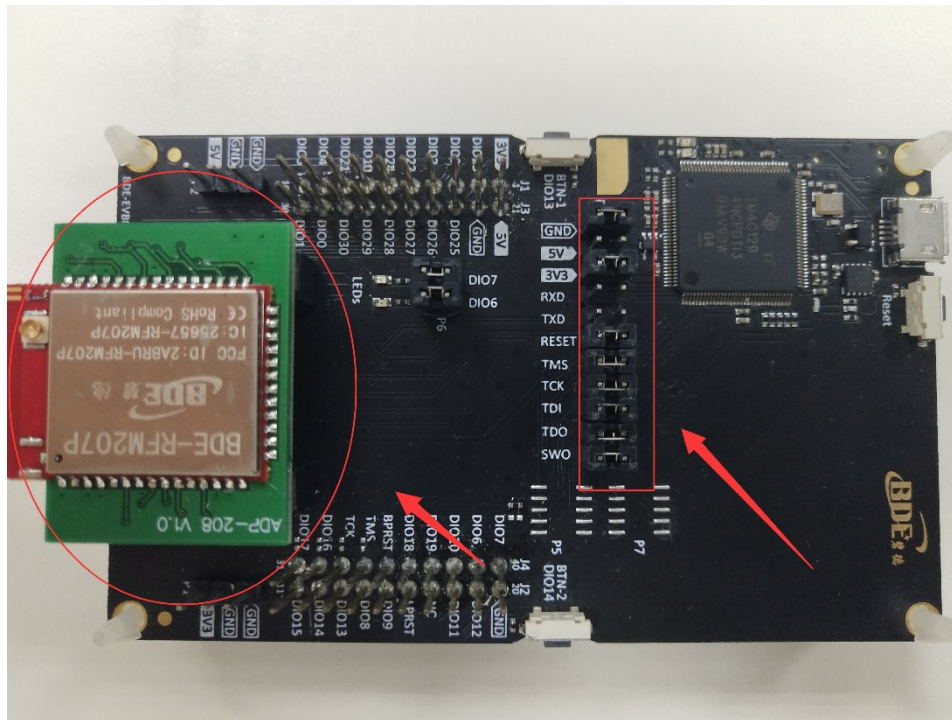

If chose TI Launchpad:
The connection is as following.

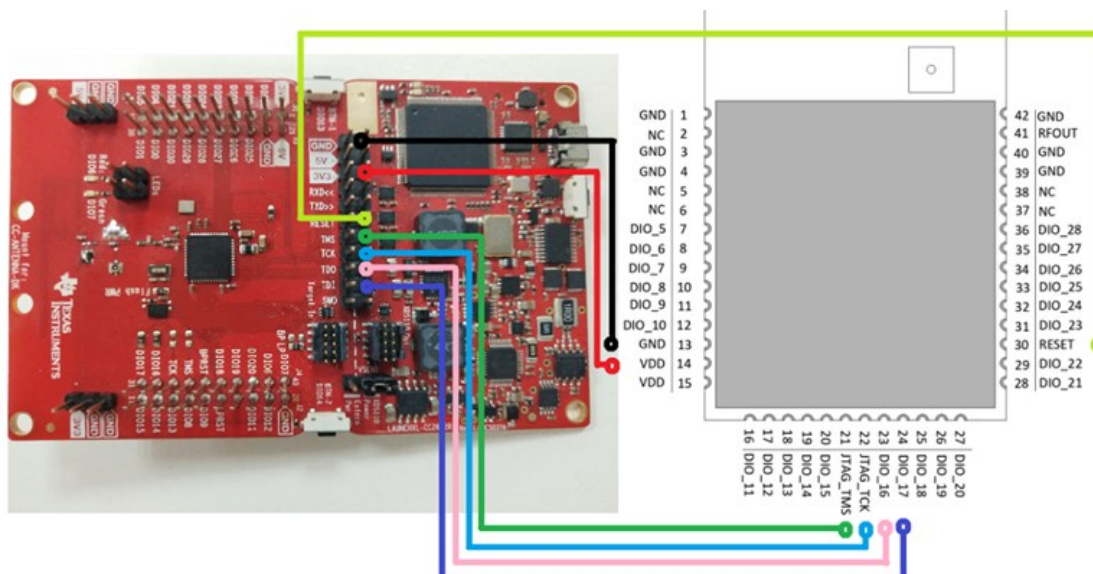

Connection Designator	BDE-RFM207P	LaunchPad Pin
3V3 Power	VDD	3V3
Ground	GND	GND
RST	RST	RESET
TMS	TMS	TMS
TCK	TCK	TCK
TDO	DIO16	TDO
TDI	DIO17	TDI


B. Build the Application

■ Download and install the CCS and SDK

From the above links, follow the instructions in the following steps to download and install the CCS and SDK.

■ CCS Installation

1. Click on this option

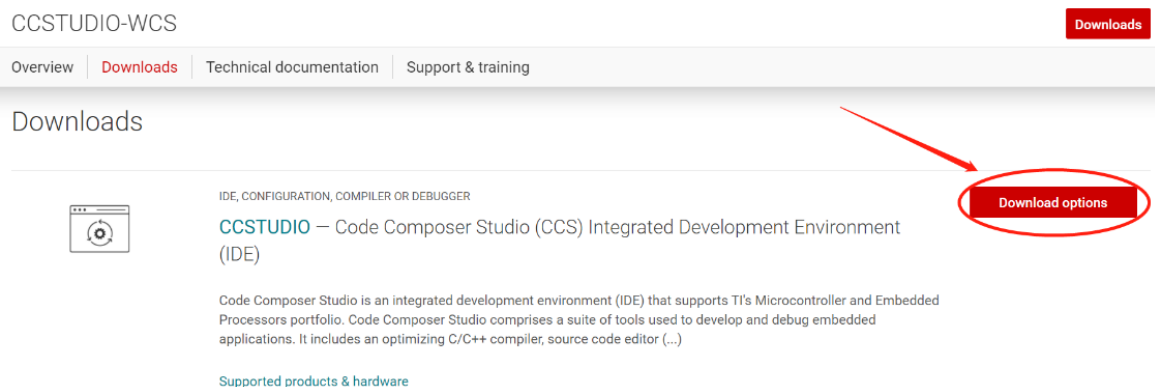

CCSTUDIO-WCS Downloads

Overview **Downloads** Technical documentation Support & training

Downloads

IDE, CONFIGURATION, COMPILER OR DEBUGGER

CCSTUDIO – Code Composer Studio (CCS) Integrated Development Environment (IDE)

Code Composer Studio is an integrated development environment (IDE) that supports TI's Microcontroller and Embedded Processors portfolio. Code Composer Studio comprises a suite of tools used to develop and debug embedded applications. It includes an optimizing C/C++ compiler, source code editor (...)

[Supported products & hardware](#)

Download options

2. Select an option to download CCS

Download options



Code Composer Studio (CCS) Integrated Development Environment (IDE)

Version: 10.3.0.00007

Release date: 05 Apr 2021

SINGLE FILE INSTALLERS

 [Windows single file installer for CCS IDE \(1181753652 KB\)](#)
 [Linux single file installer for CCS IDE \(1102001729 KB\)](#)
 [macOS single file installer for CCS IDE \(1083552986 KB\)](#)

ON-DEMAND INSTALLERS

 [Windows on-demand installer for CCS IDE \(40136960 KB\)](#)
 [Linux on-demand installer for CCS IDE \(25338386 KB\)](#)
 [macOS on-demand installer for CCS IDE \(24595266 KB\)](#)


3. Unzip the package to a local disc

	CCS10.3.0.00007_win64.zip	2021/4/19 11:11	WinRAR ZIP
	CCS10.3.0.00007_win64	2021/4/20 11:36	文件夹


4. Click the setup of CCS

	binary	2021/3/29 21:38
	CCS10.3.0.00007_win64	2021/4/19 11:23
	components	2021/3/29 21:38
	features	2021/3/29 21:38
	artifacts.jar	2021/3/29 21:38
	ccs_setup_10.3.0.00007.exe	2021/3/29 21:37
	content.jar	2021/3/29 21:38
	README_FIRST_win64.txt	2021/3/29 21:38
	timestamp.txt	2021/3/29 21:38


5. Click "Next"

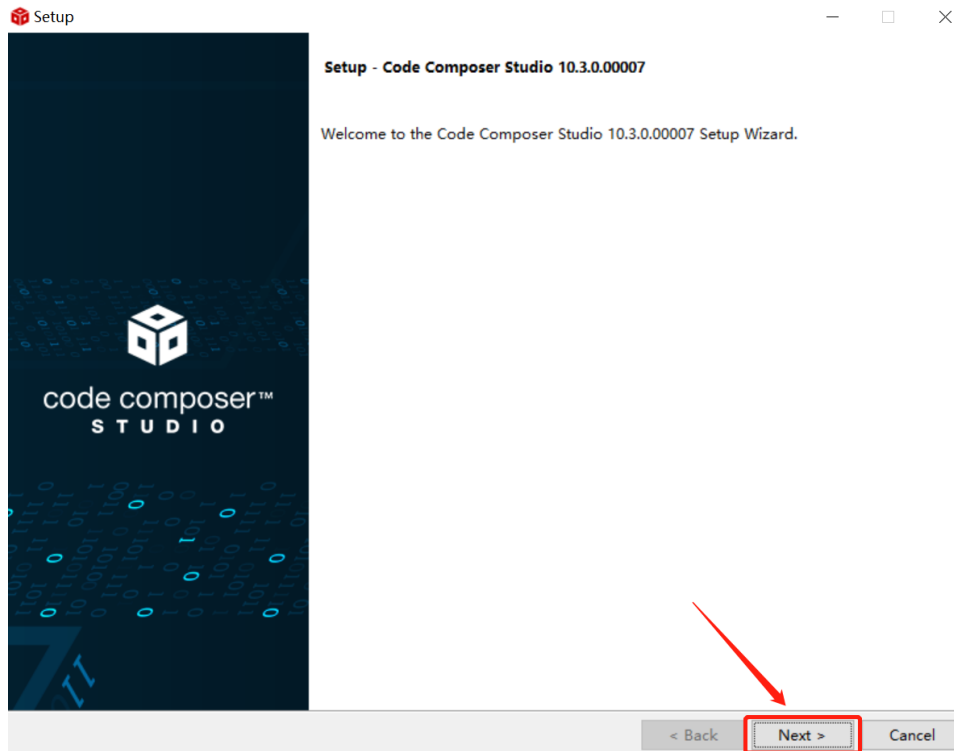


6. Select the default option

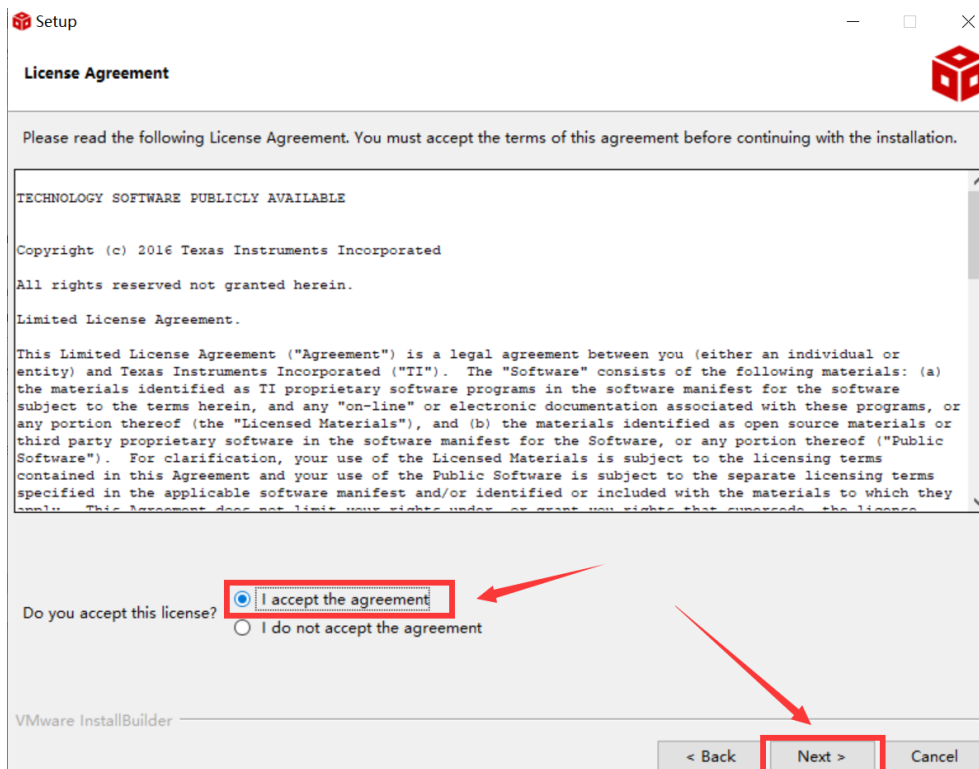


7. Click "Next"

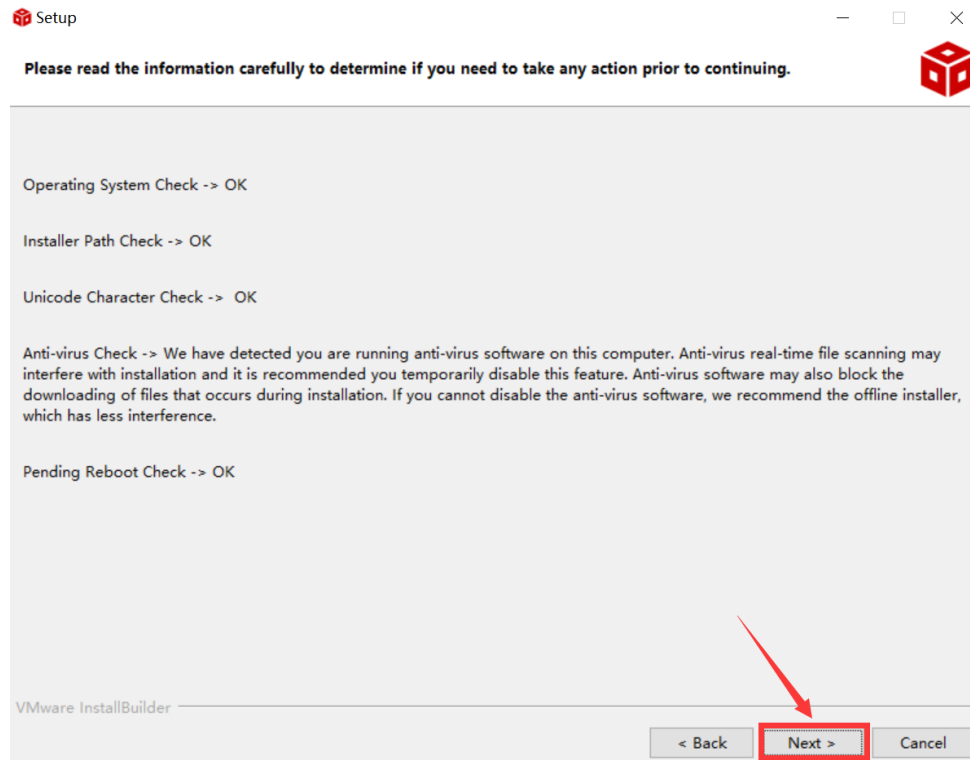


8. Select the Installation Directory

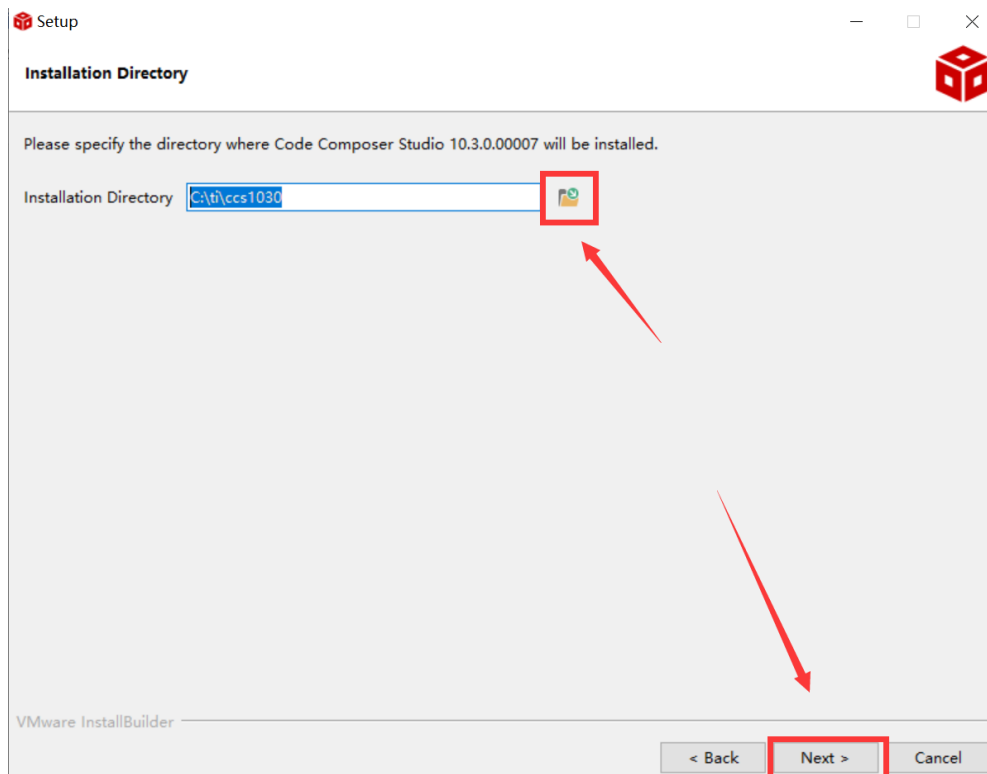


9. Select the default option

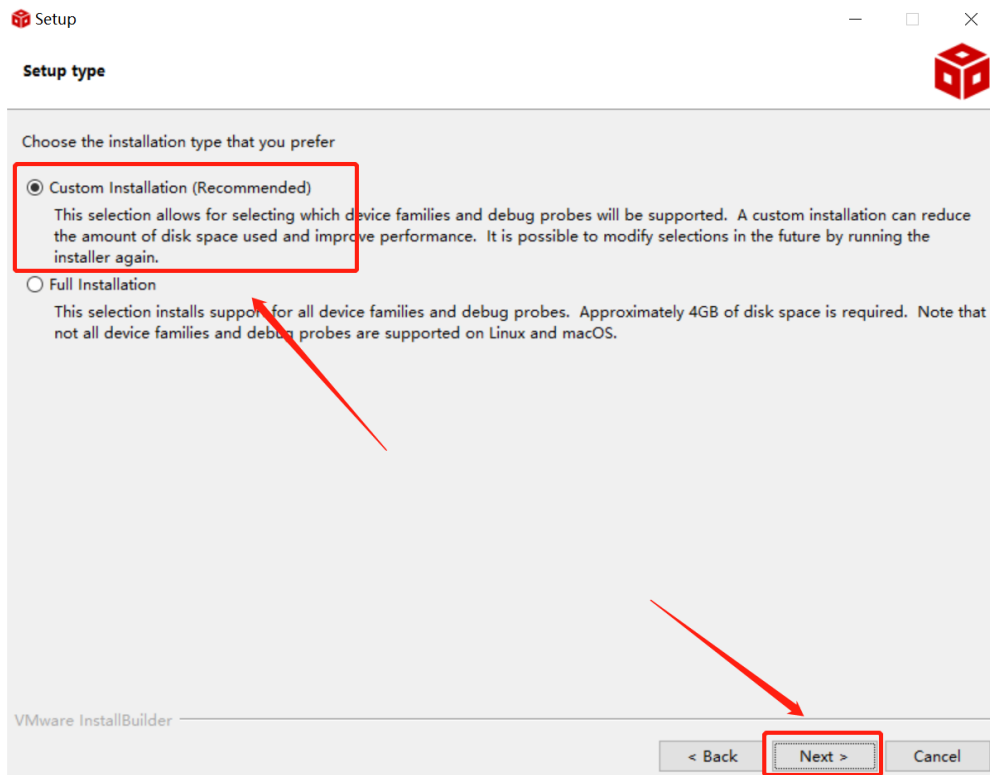


10. Select the component

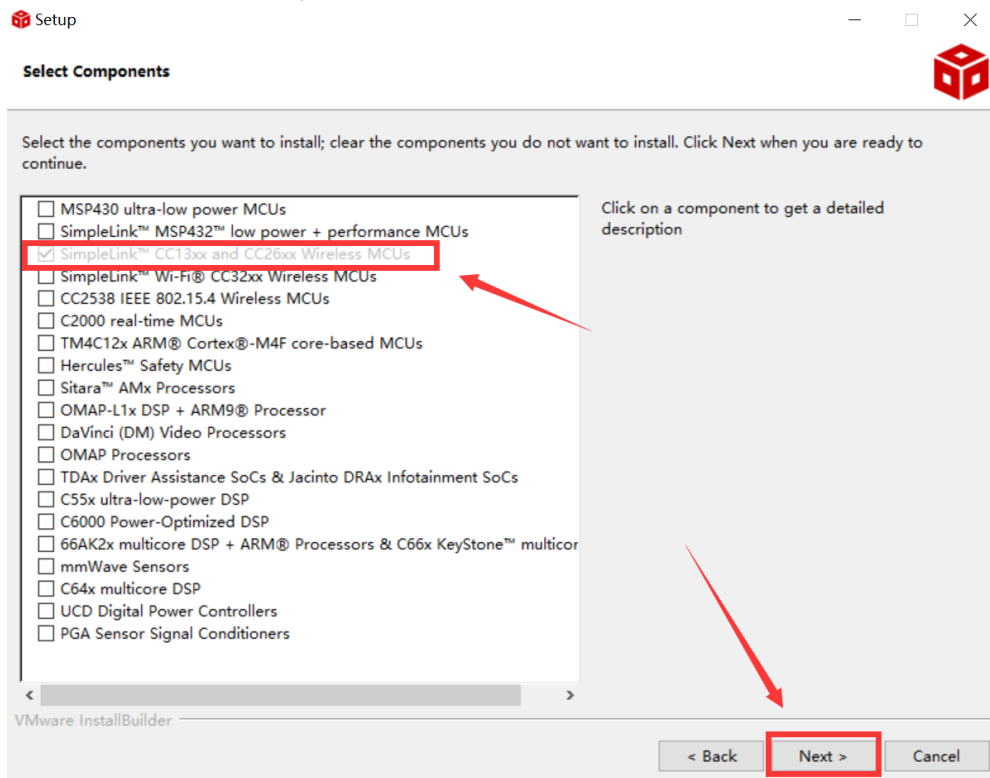


11. Select the default option

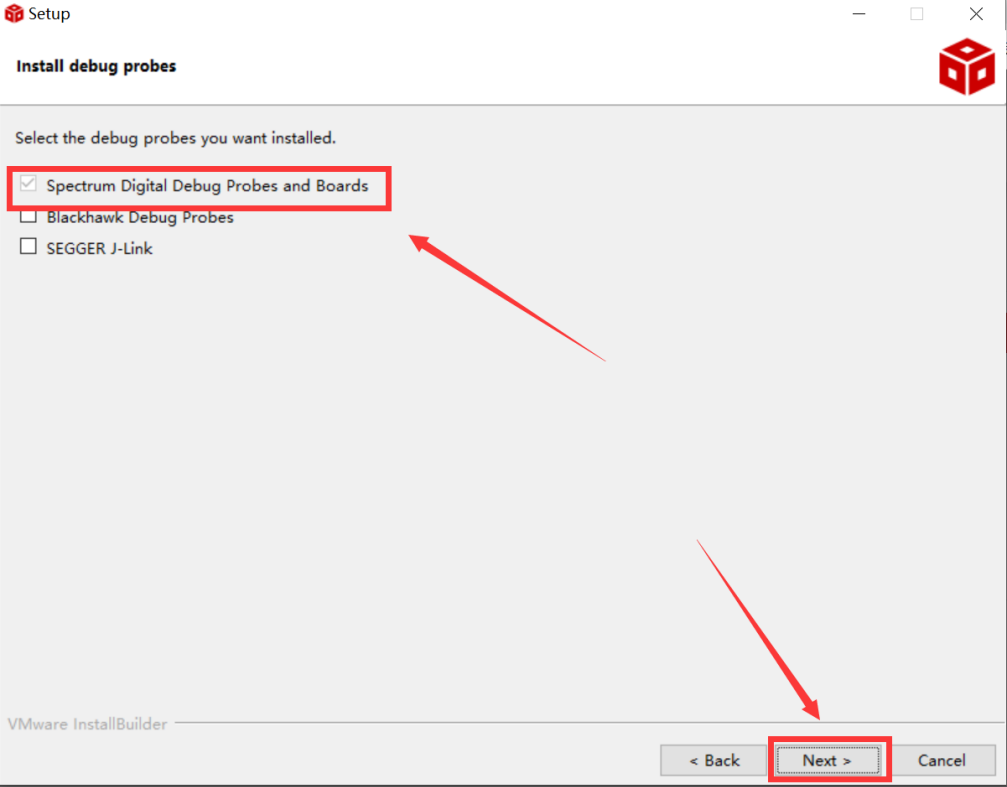


12. Click "Next"

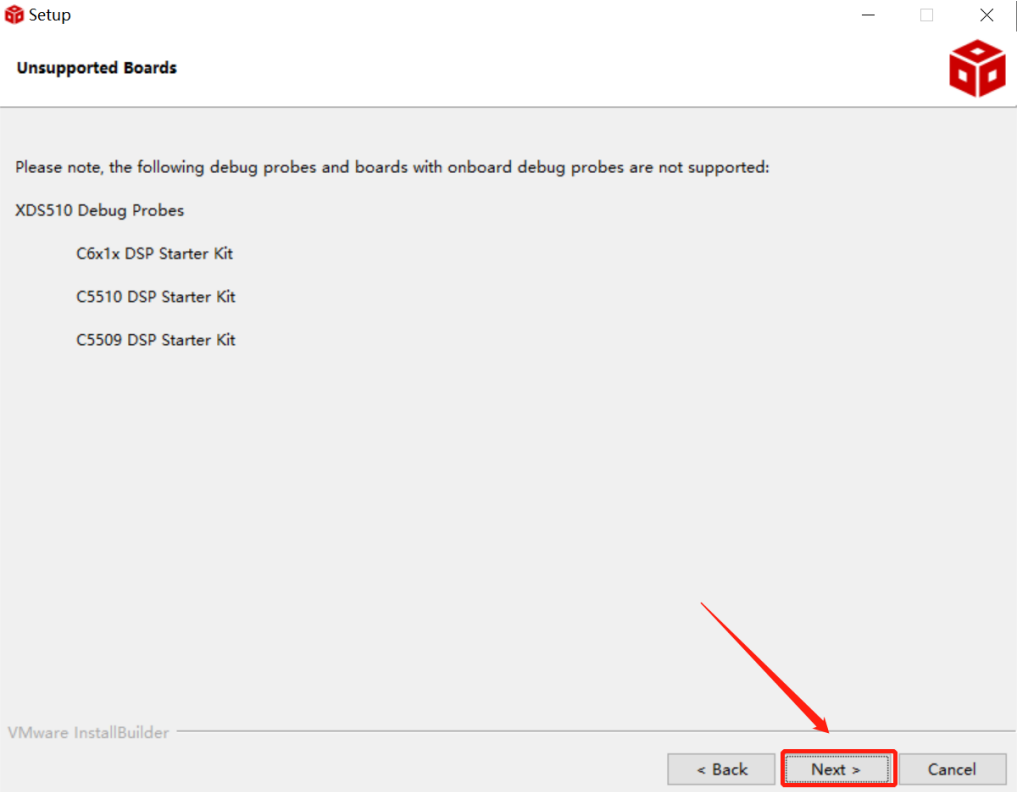

13. Click “Next”

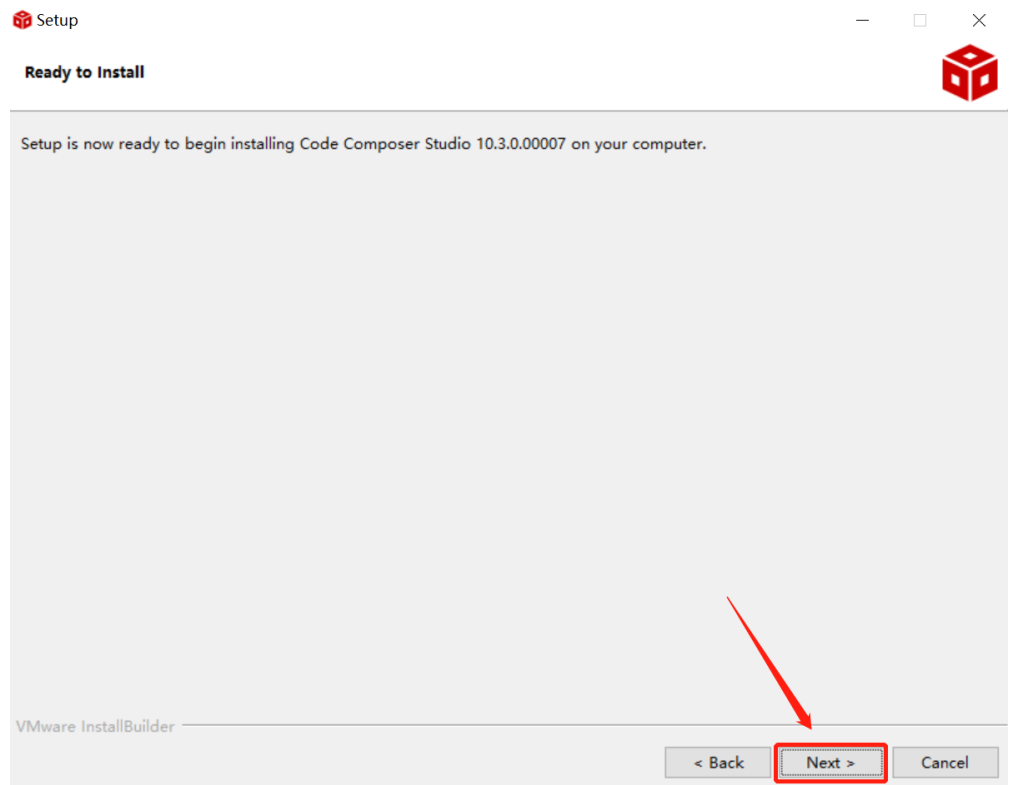


14. Waiting for installation to complete

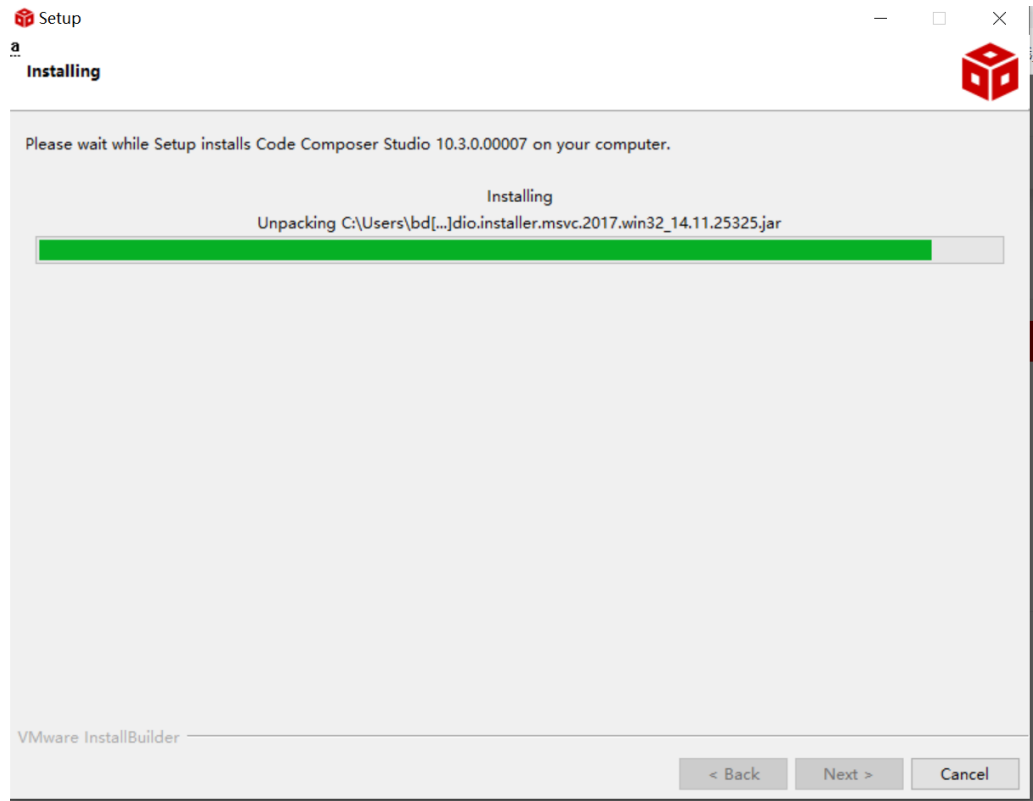

■ Software Development Kit (SDK) installation

1. Click on this option

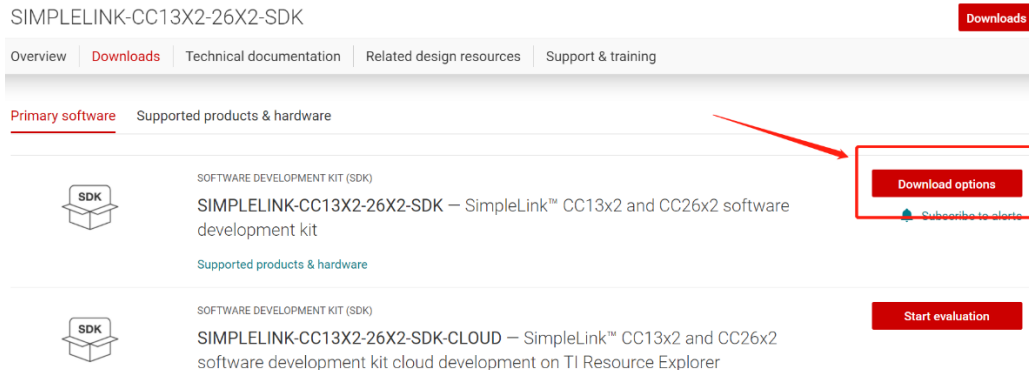

SIMPLELINK-CC13X2-26X2-SDK Downloads

Overview | **Downloads** | Technical documentation | Related design resources | Support & training


Primary software | Supported products & hardware

 SOFTWARE DEVELOPMENT KIT (SDK)
SIMPLELINK-CC13X2-26X2-SDK – SimpleLink™ CC13x2 and CC26x2 software development kit
[Supported products & hardware](#)

Download options [Subscribe to alerts](#)

 SOFTWARE DEVELOPMENT KIT (SDK)
SIMPLELINK-CC13X2-26X2-SDK-CLOUD – SimpleLink™ CC13x2 and CC26x2 software development kit cloud development on TI Resource Explorer
Start evaluation

2. Select an option you need to download SDK

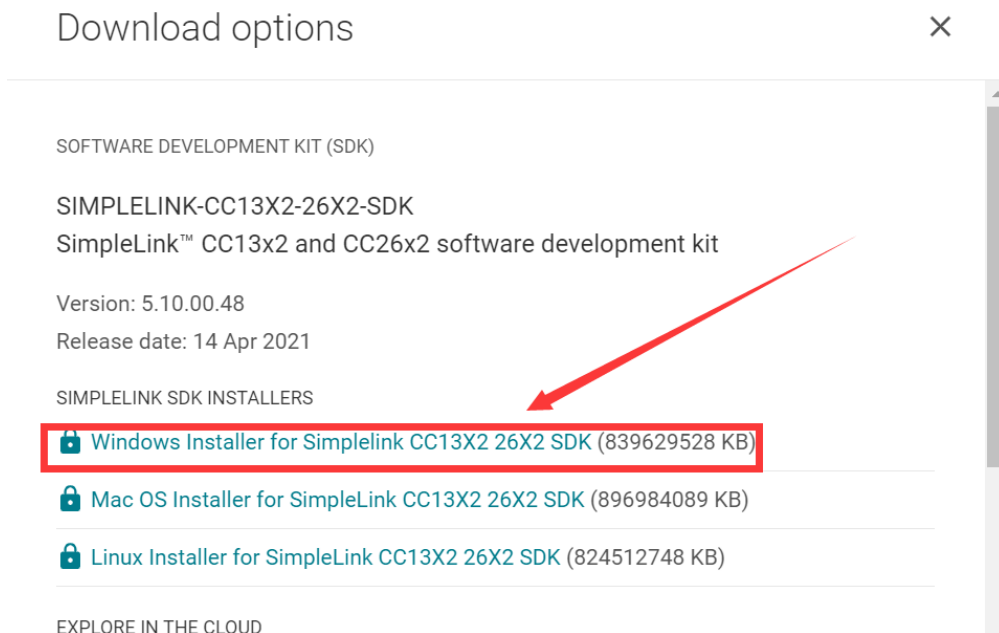

Download options ×

SOFTWARE DEVELOPMENT KIT (SDK)

SIMPLELINK-CC13X2-26X2-SDK
SimpleLink™ CC13x2 and CC26x2 software development kit

Version: 5.10.00.48
Release date: 14 Apr 2021

SIMPLELINK SDK INSTALLERS

 **Windows Installer for Simplelink CC13X2 26X2 SDK (839629528 KB)**

 Mac OS Installer for SimpleLink CC13X2 26X2 SDK (896984089 KB)

 Linux Installer for SimpleLink CC13X2 26X2 SDK (824512748 KB)

EXPLORE IN THE CLOUD

3. Log in to your TI account, if you are a new user, register a TI account first

myTI account

[myTI FAQ](#)

Existing myTI user?

Your email address

Your myTI password

☒ Remember me

[Forgot your password?](#)

By logging in, you agree to
TI's [Terms of use & Privacy policy](#).

4. Select "civil" if your application is for civil use

ort

ll

e will
d 1-

U.S. Government export approval:

All fields are Required. Incomplete information will be DENIED.

First name:

Last name:

Your email address:

Your full company/university name:

Country this file will be used in:

What end-equipment/application will you use this file for:

☐ Military

☒ Civil

I certify that the following is true:

5. Select "Yes" and submit

compliance with any such import, use, or export restrictions.

- I / We hereby certify that we will adhere to the conditions above.
- I / We do not know of any additional facts different from the above.
- I / We take responsibility to comply with these terms.
- I / We understand we are responsible to abide by the most current. versions of the Export Administration Regulations and other U.S. export and sanctions laws.

I CERTIFY ALL THE ABOVE IS TRUE:

Yes ☒ No ☐

Submit

Thank you,
Texas Instruments

6. Download SDK

TI Home

TI Request

You have been approved to receive this file.
Click "Download" to proceed.

In a few moments, you will also receive an email with the link to this file.

Download

Having trouble downloading? Try www.ti.com/software-help


Thank you,
Texas Instruments

7. Installation

 simplelink_cc13x2_26x2_sdk_5_10_00_48.exe 2021/4/19 15:11




8. Click "Next"

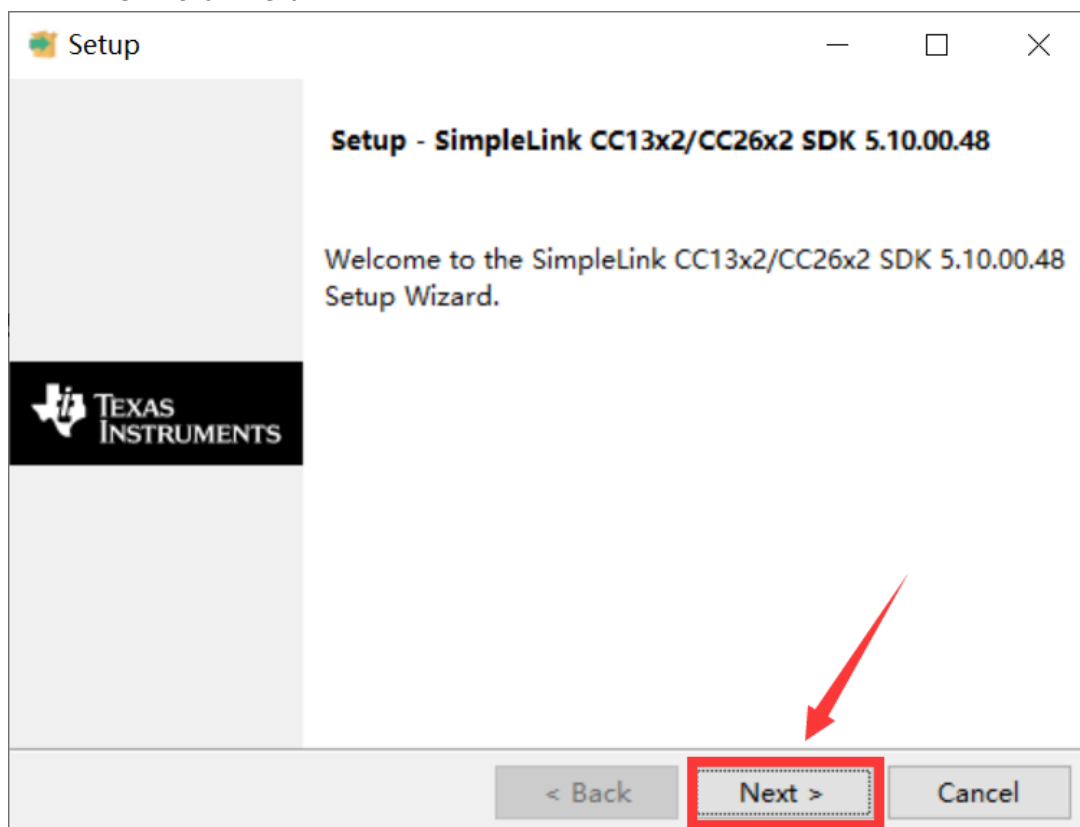


9. Select the default option




10. Select the Installation directory

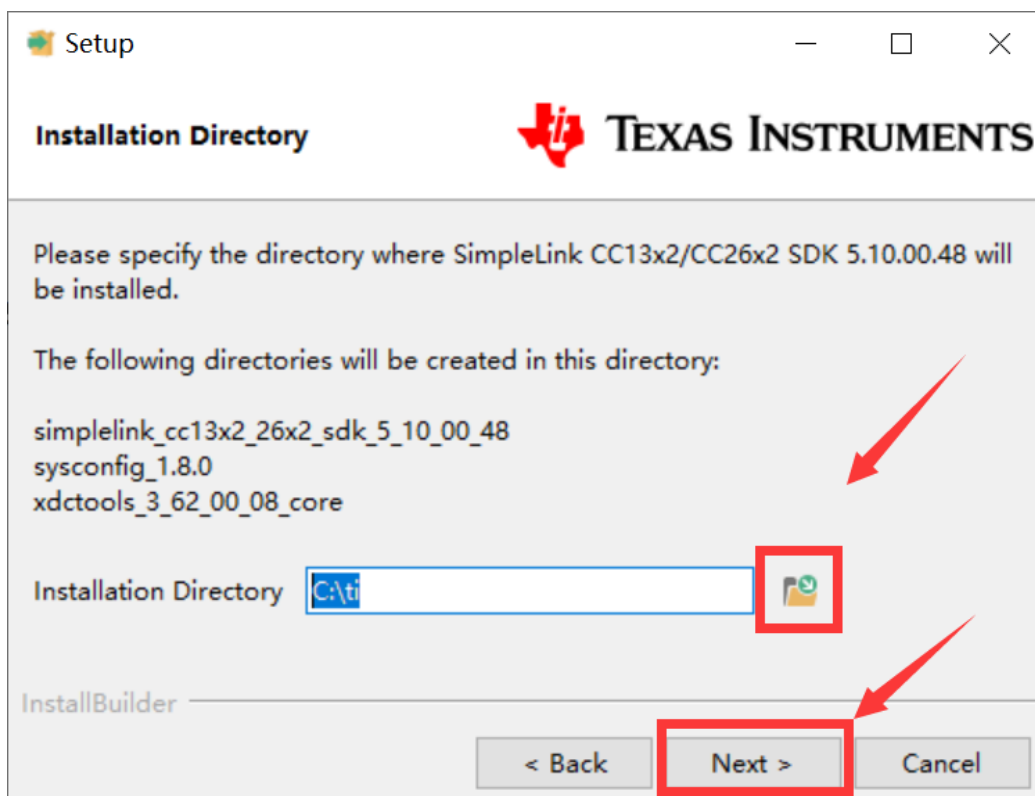

11. Click "Next"

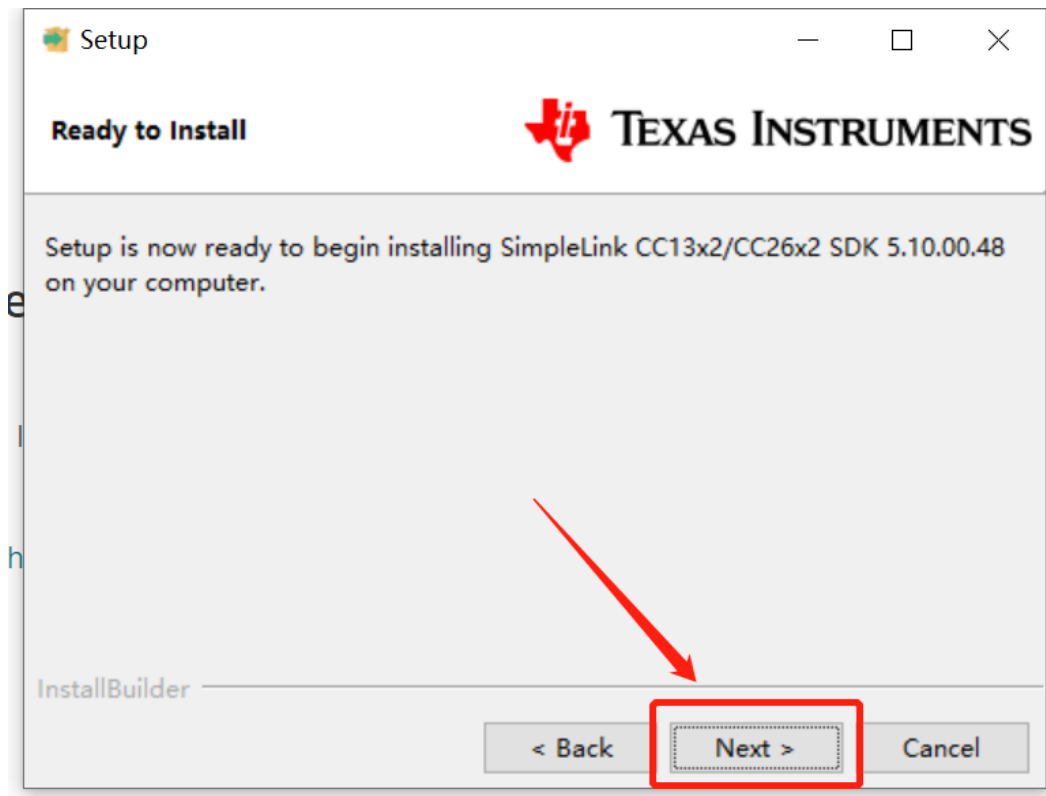


12. Waiting for installation to complete

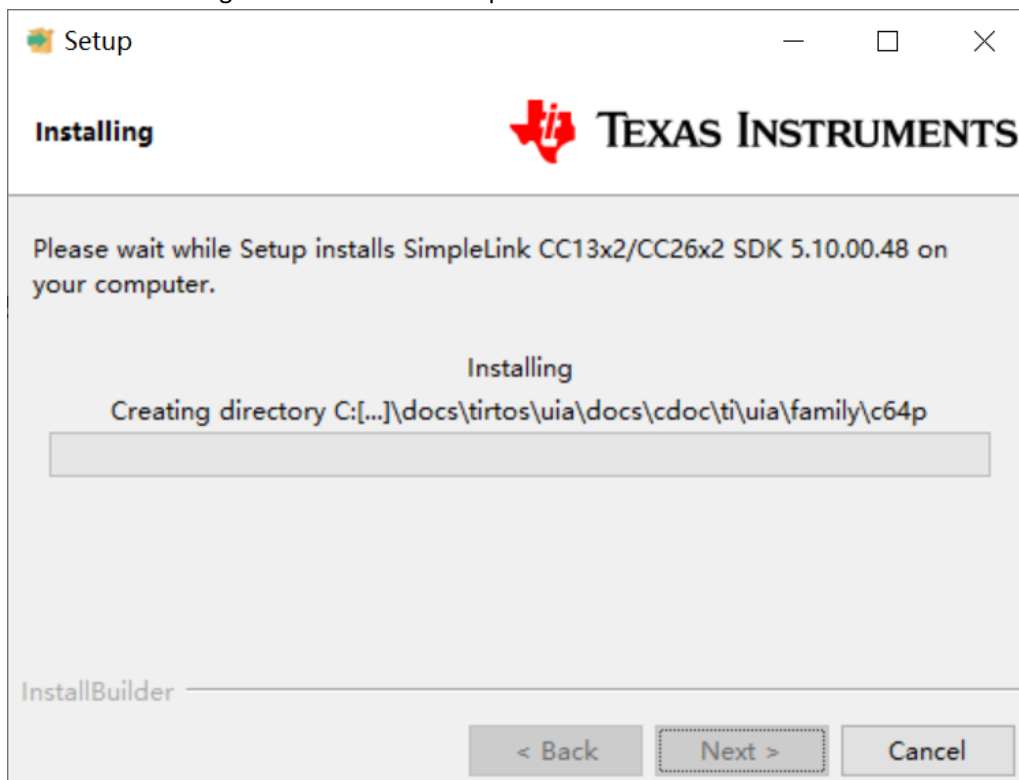


- Run an example/demo code


- Find the option named "Import CCS project..."

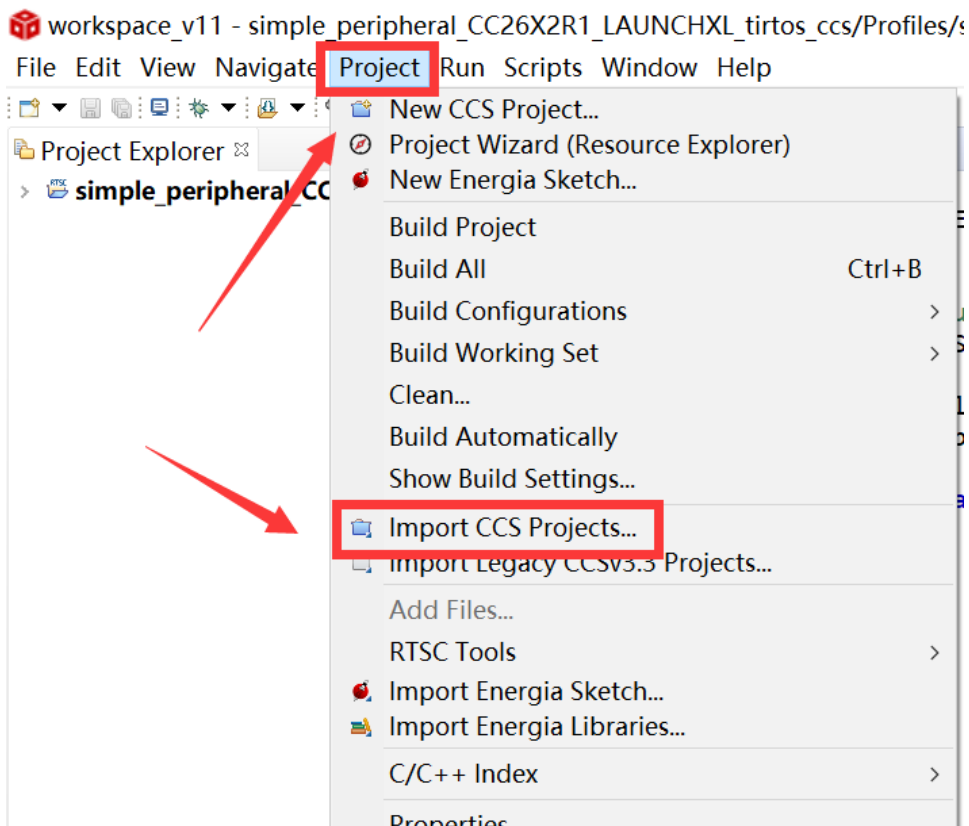


- According to the following path to find the project:
ti\simplelink_cc13x2_26x2_sdk_5_10_00_48\examples\rtos\CC26X2R1_LAUNCHXL\ble5stack\simple_peripheral\tirtos\ccs

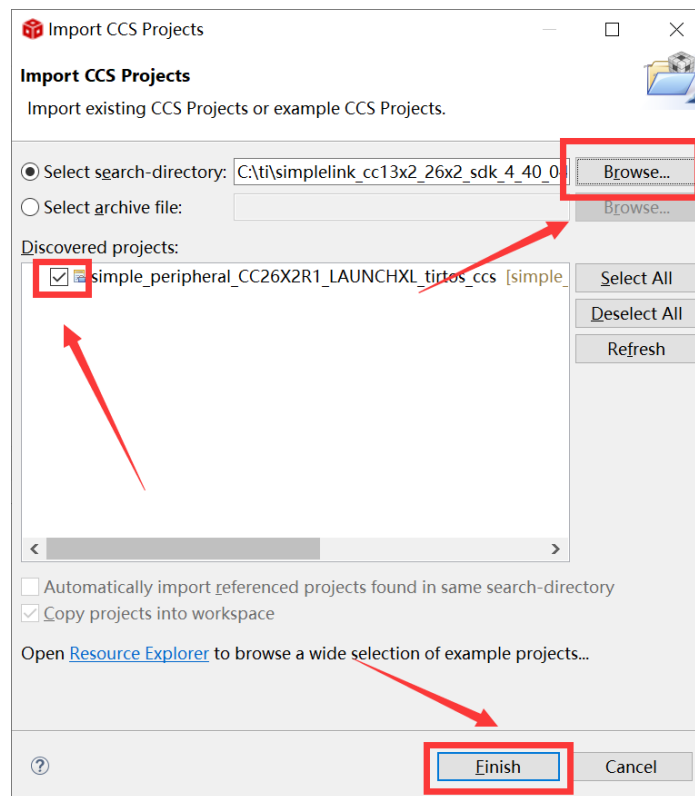


3. Right click the project

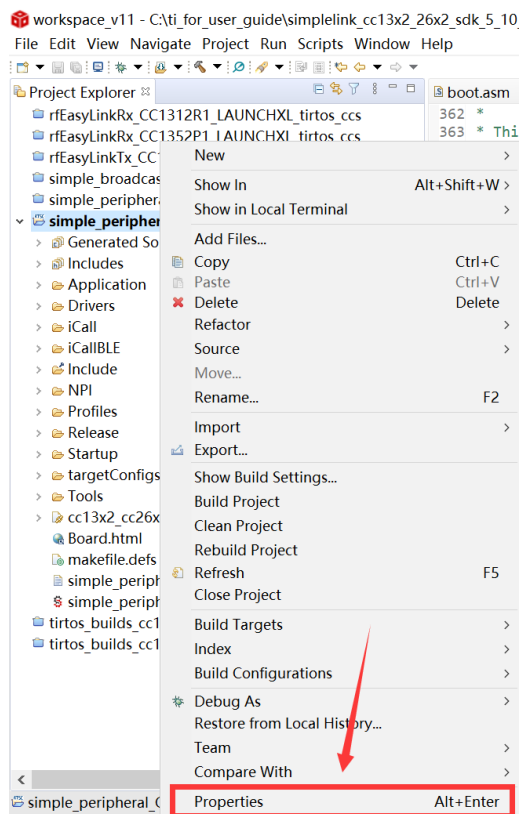


4. Find the Predefined Symbols

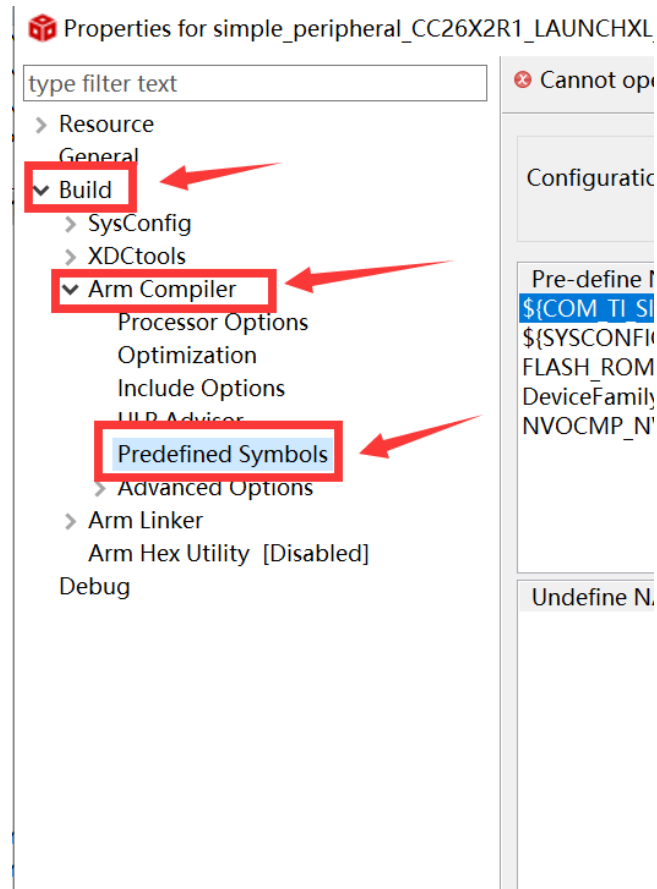


5. Add it to the project like the following picture shows

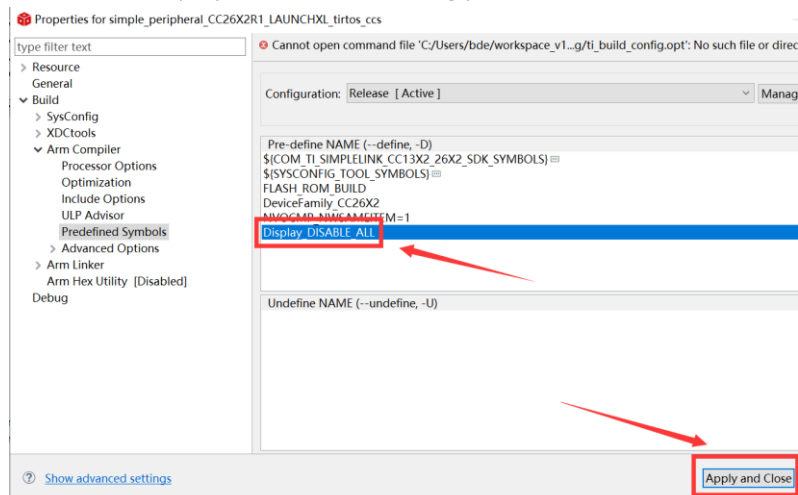


6. Open the file "simple_peripheral.syscfg"

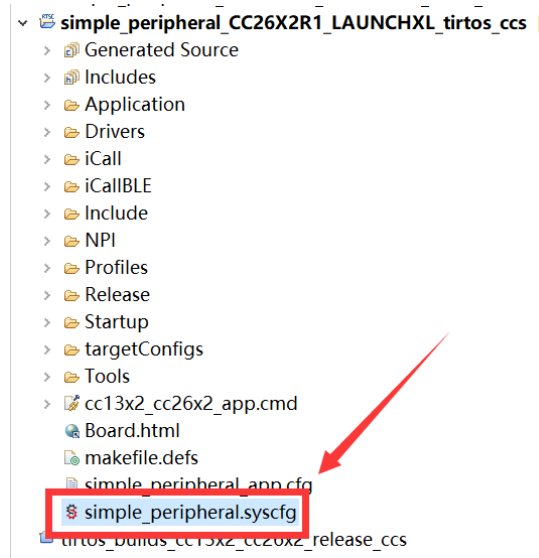


7. Click the hardware icon

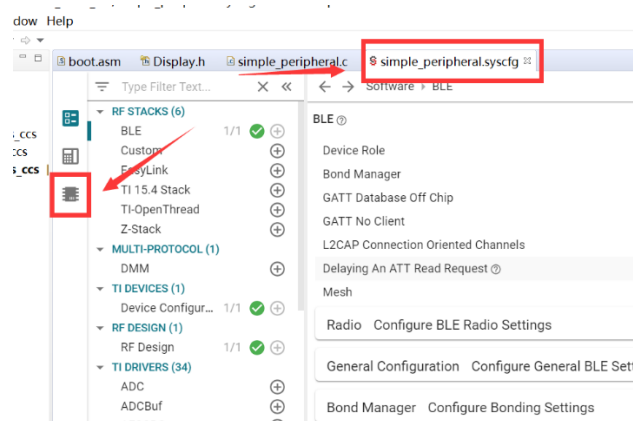


8. Find “XDS110 UART” option

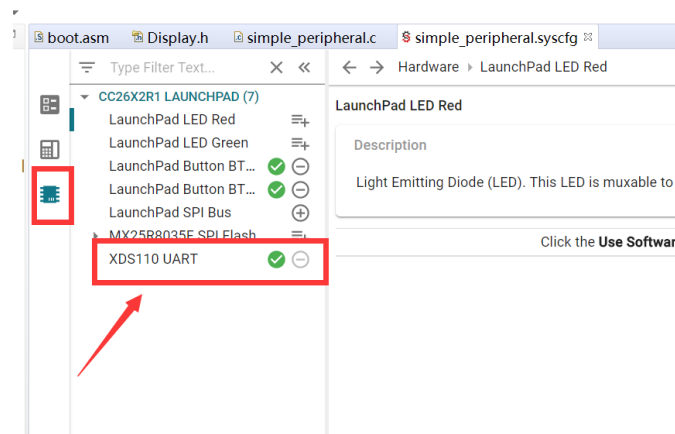


9. Delete the "CONFIG_Display_0" option

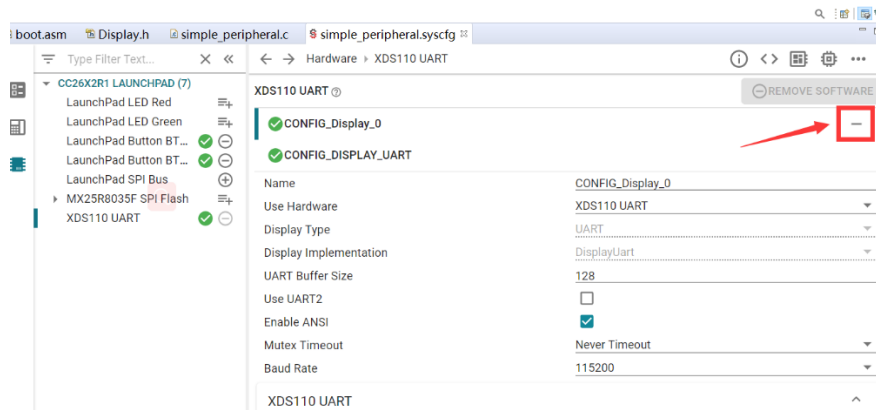


10. Close this file

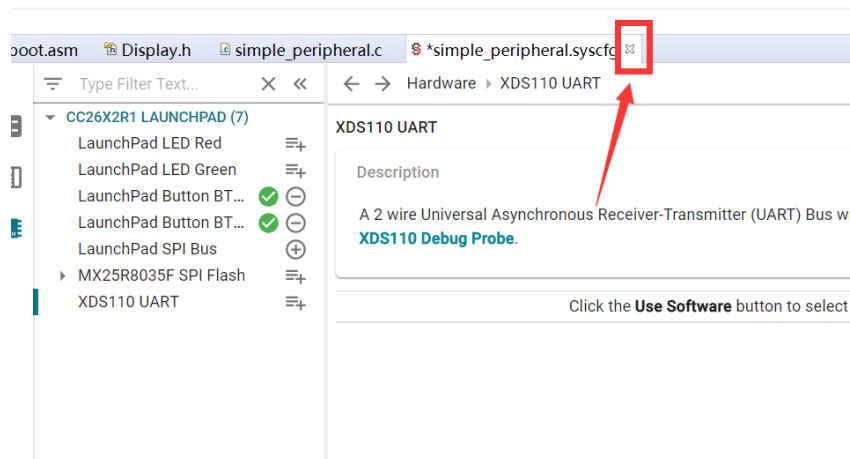


11. Save changes

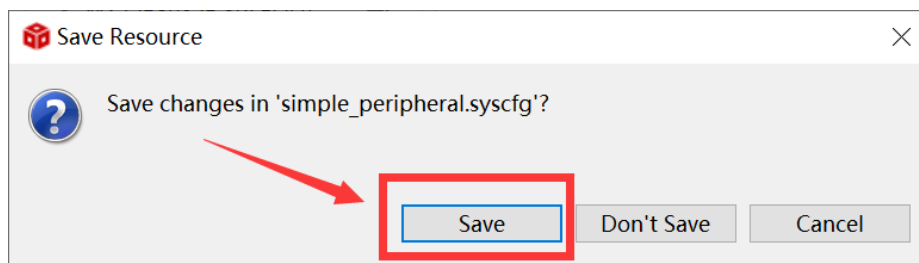


12. Right Click the project to build project

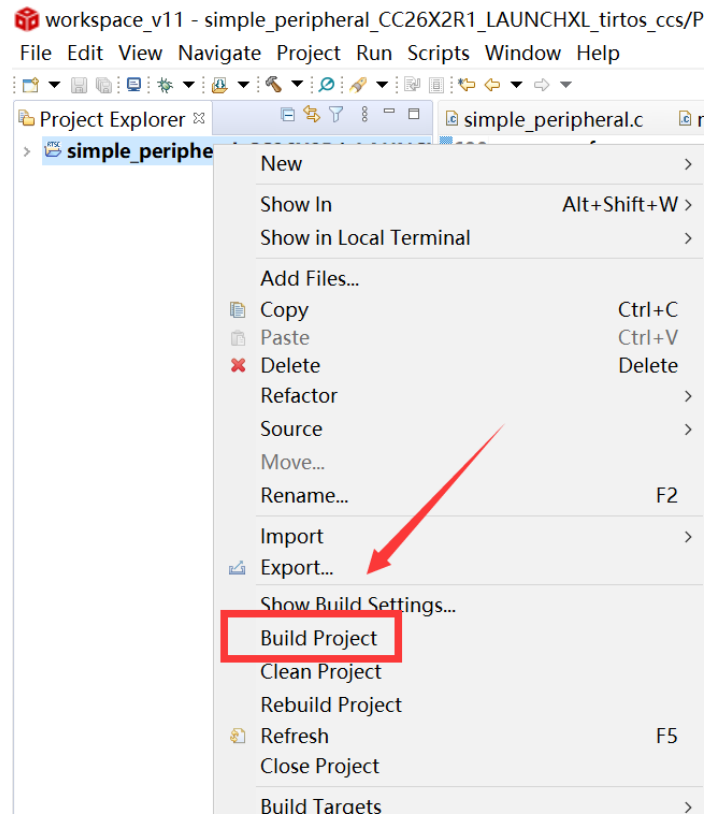


13. Click this bug icon (means download and debugging)

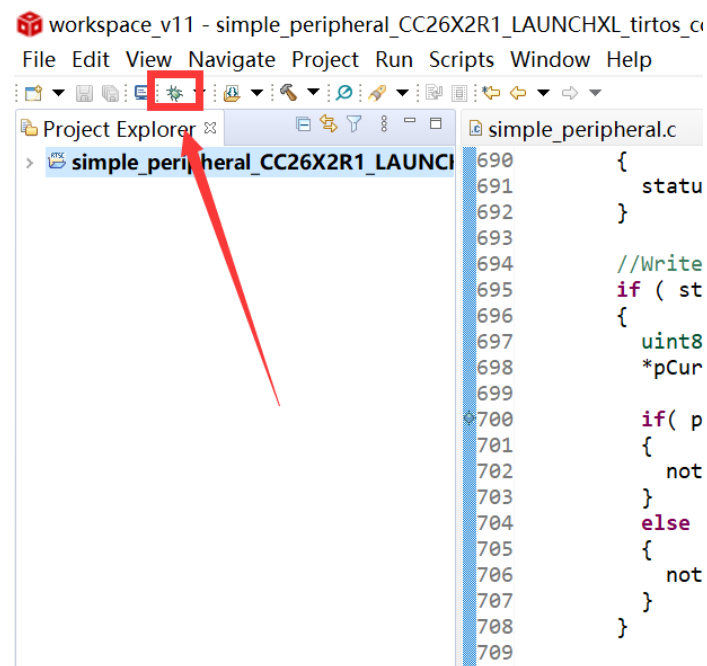


14. Download and start nRF Connect (an APP on your mobile device)

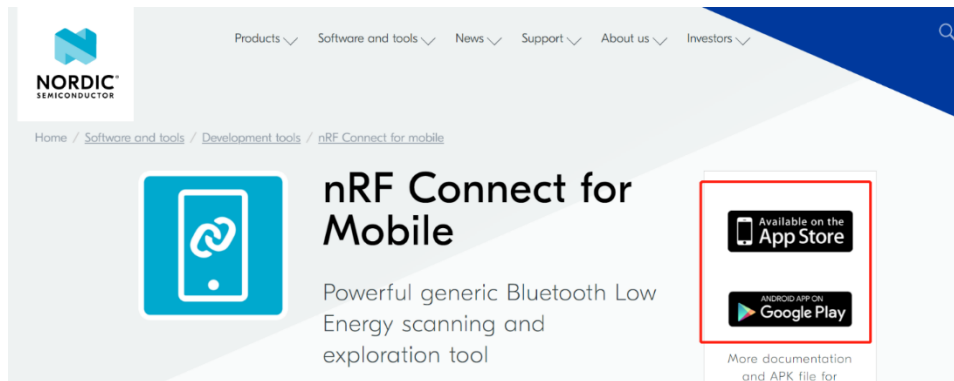


15. Click on this option to start debugging

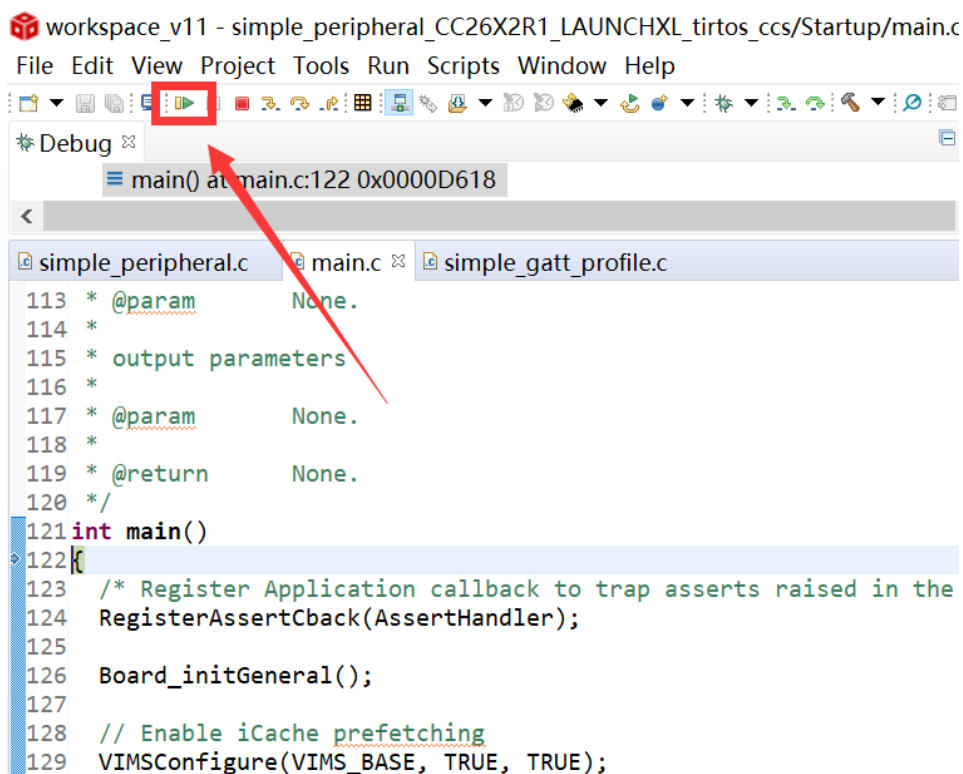


16. BDE-RFM207P is advertising, you can receive the signal on nRF Connect, then click "connect" to connect the mobile phone and the BDE-RFM207P

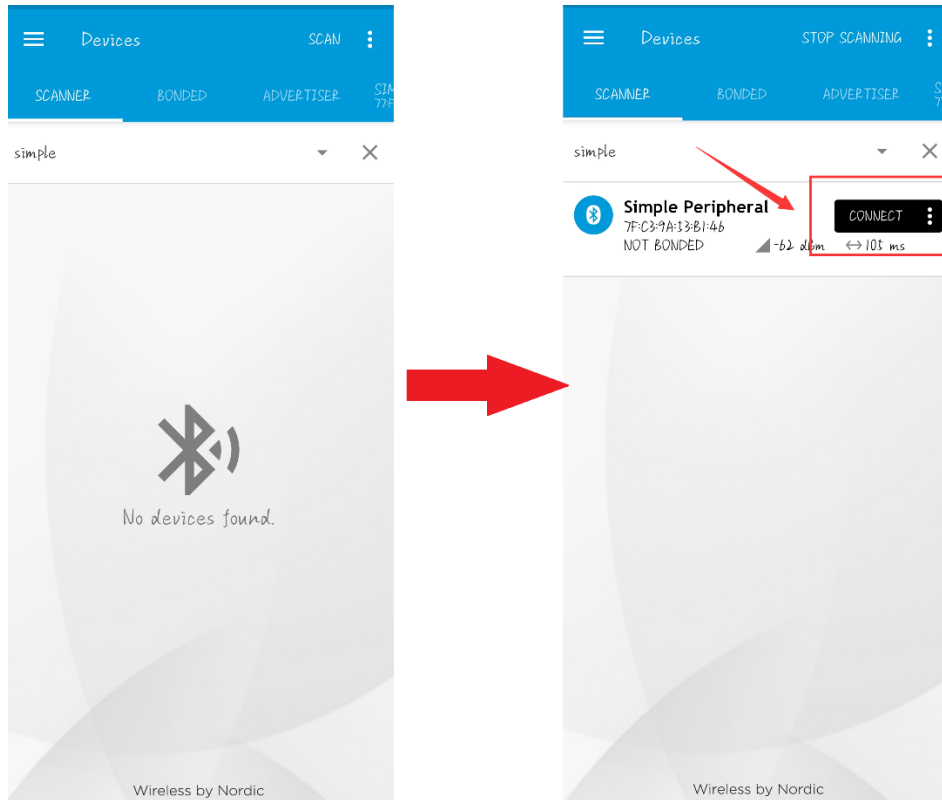


17. Find the file which is named “simple_gatt_profile.c” and the function which is named “simpleProfile_WriteAttrCB”

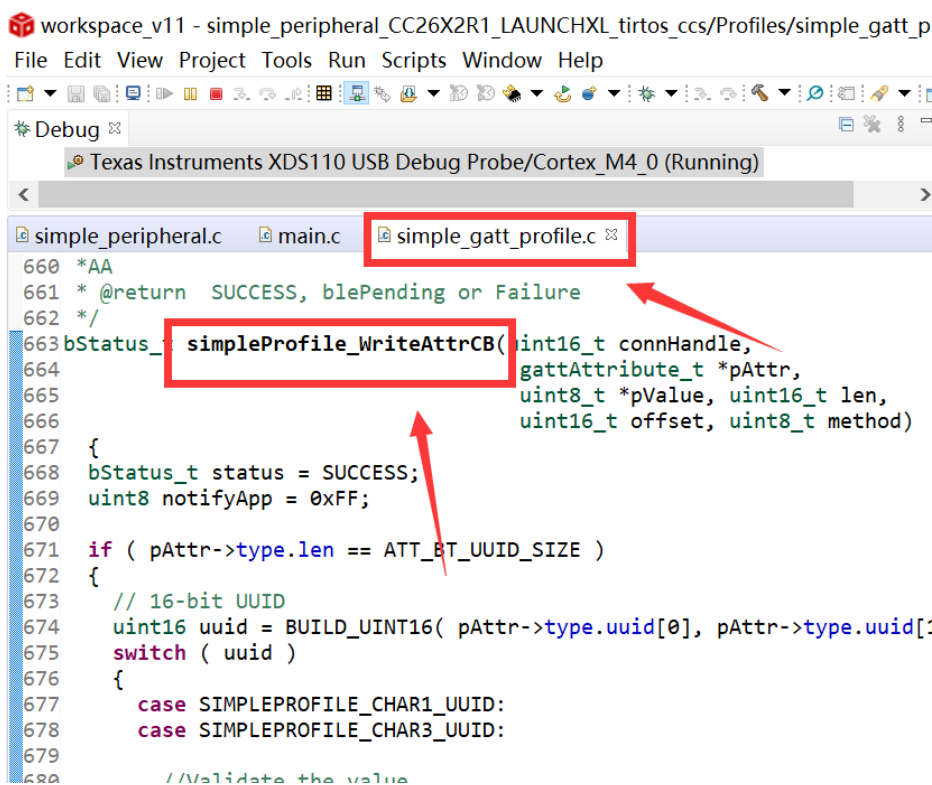


18. Find “pValue” in the function and set a breakpoint at the same line

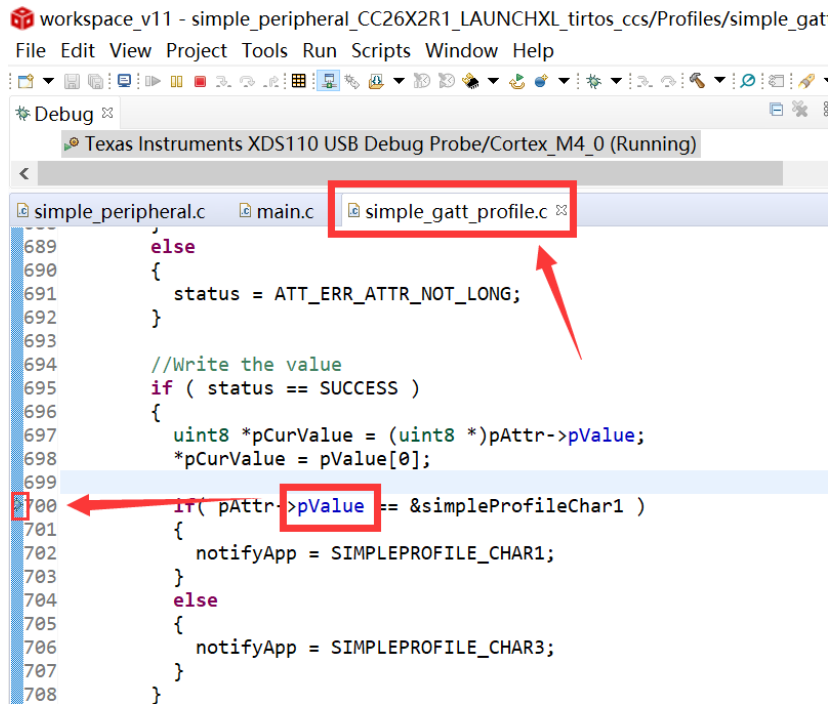


19. Click the up arrow to send a message to the BDE-RFM207P

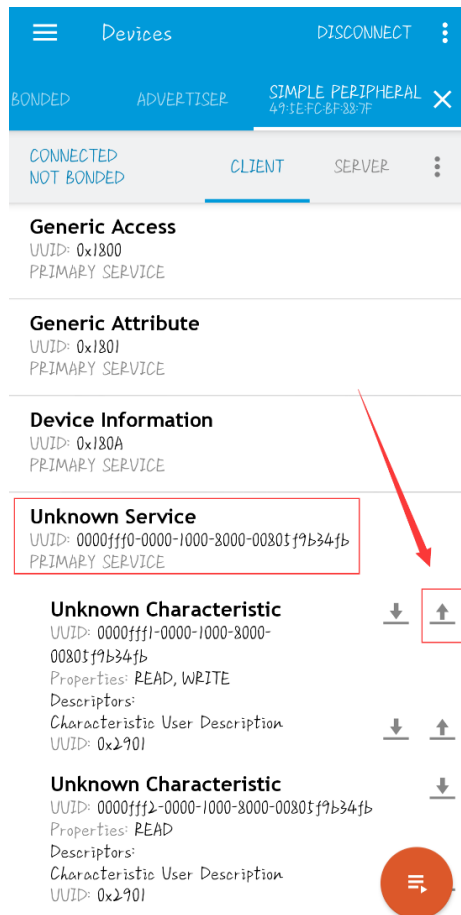

20. Send 0x11 to the BDE-RFM207P

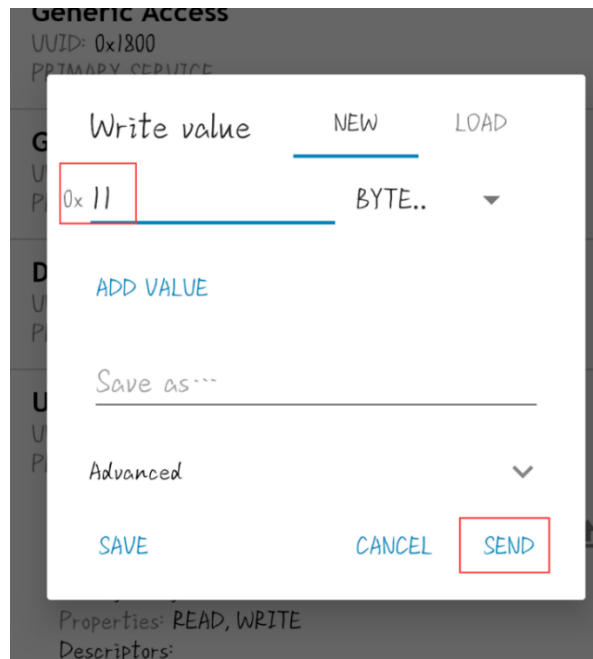

21. The program stops at the breakpoint, the value received is 0x11

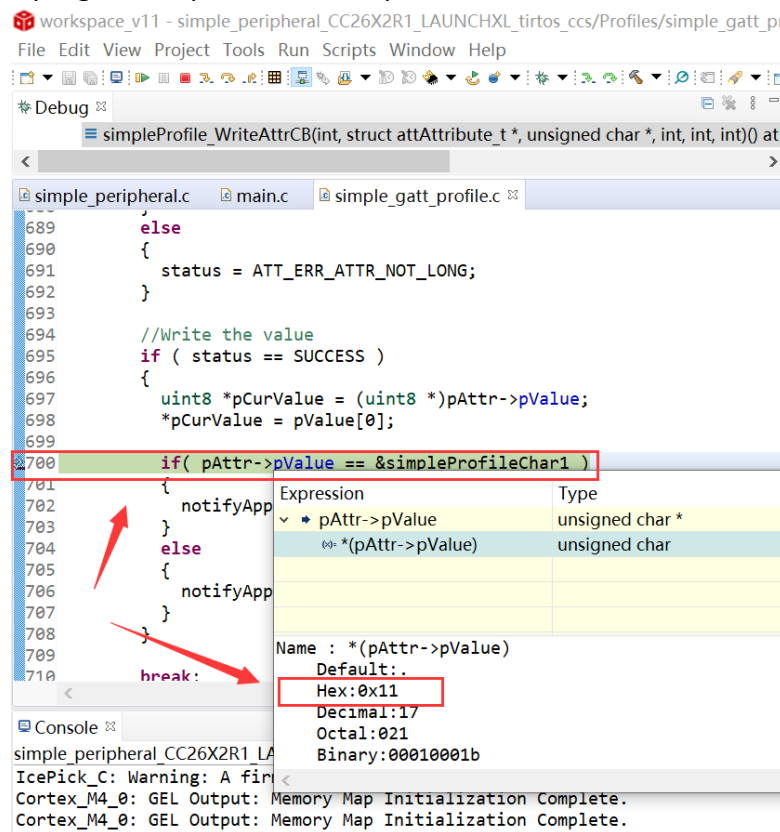

By far you should've built your first application successfully.

For further development, please check out the [CC2652P data sheet, product information and support | TI.com](#) page and download the User guide (<https://www.ti.com/lit/pdf/swcu185>)

Other Resources

[Mac OS Installer for SimpleLink CC13X2 26X2 SDK](#)

[Linux Installer for SimpleLink CC13X2 26X2 SDK](#)

[Mac OS Installer for Code Composer Studio IDE](#)

[Linux Installer for Code Composer Studio IDE](#)

[CC2652P SimpleLink™ Multiprotocol 2.4 GHz Wireless MCU With Integrated Power Amplifier datasheet \(Rev. B\)](#)

[Windows Installer for SmartRF Flash Programmer 2](#)

Revision History

Revision	Date	Description
V1.0	8-Jul-2019	Initial Release
V1.1	20-Jul-2019	Editorial Correction
V2.0	14-Apr-2021	Replacement of template

More Questions:

Please search existing answers on [TI E2E support forums](#)

Contact your local TI sales representative.

Or

Contact BDE Technology, Inc.

China:

B2-403, 162 Science Ave, Huangpu District, Guangzhou, 510663

Tel: +86-020-28065335

Website: <http://www.bdecomm.com/cn/> Email: shu@bdecomm.com

USA:

67 E Madison St, #1603A, Chicago, IL 60603

Tel: +1-312-379-9589

Website: <http://www.bdecomm.com/> Email: info@bdecomm.com